



Almega Friendly series II

Robot Product Catalog



In accordance with DAIHEN's policy to make continuing improvements, design and/or specifications are subject to change without notice and without any obligation on the part of manufacturer.

DAIHEN Corporation

4-1, Koyochi-nishi, Higashinada-ku, Kobe, Hyogo 658-0033, Japan
Phone: (Country Code 81) 78-275-2006
Fax: (Country Code 81) 78-845-8159

Distributed by :


CAT NO.R21658A IN JAPAN

Note This product and the technologies (including software) used in the product are subject to Catch-All Controls. When exporting any of them, verify the users, applications, etc. according to the applicable laws and regulations and take appropriate procedures such as applications for export permission to the Minister of Economy, Trade and Industry if required.


- The information contained in this catalog is current as of September 2021 and is subject to revision without notice.
- This product is made of FSC®-certified and other controlled material.



Arc welding robot

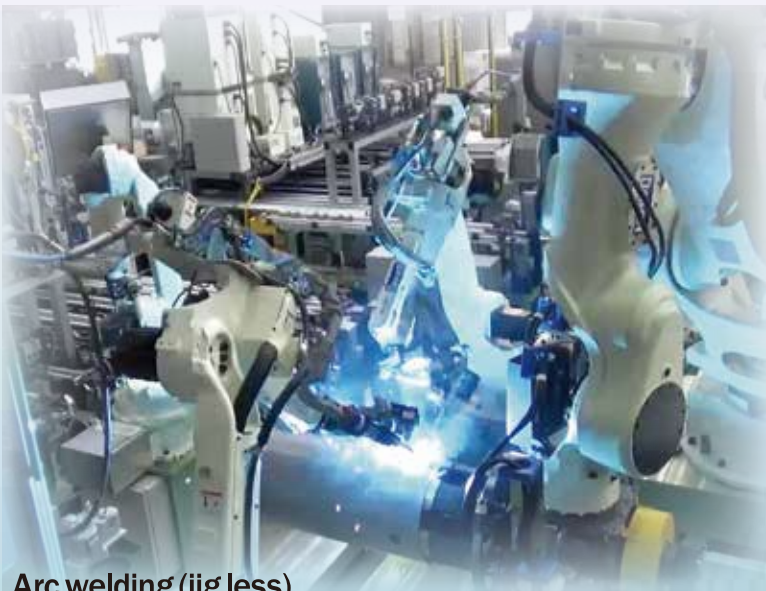


Arc welding (jig less)

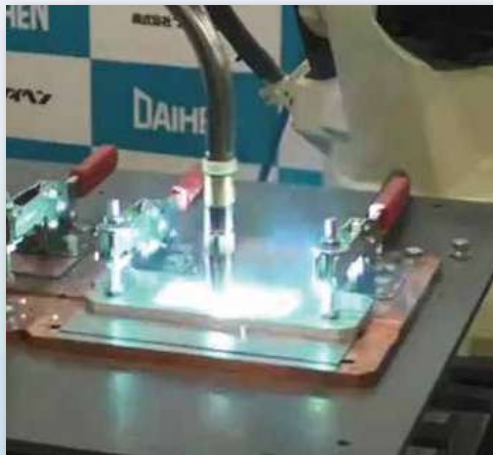

Synchro-Feed



Laser cutting

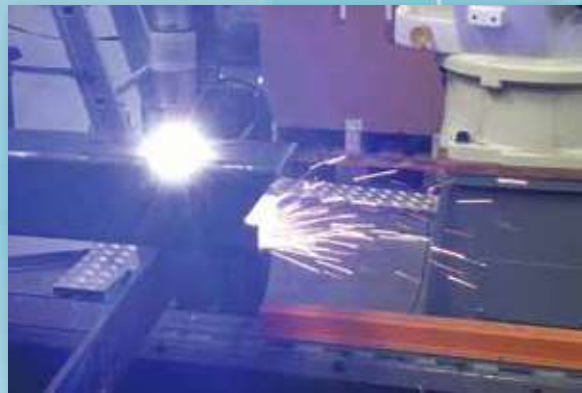

Plasma cutting



TIG welding



Spot welding



3D Vision Sensor



2D Vision Sensor



Picking



Palletizing system



Conveyor picking



Edge trimming



Sealing



Transfer between presses



Fitting

DAIHEN Robot solutions meet the demands of factory automation.

FD19 CONTROLLER The limitless potential of extensive “connectivity”

Meet the demands from introduction to advanced automation.

Easily “connects” with peripheral equipment
Simple connection to the host system by built-in PLC

High-performance built-in software PLC



Graphical interface offers the functionality of popular PLCs.



“Connects” with IoT remote service

Remote TP

Remote Diagnosis

Remote Software update



“Connecting” Variation
Compact body and high expandability

Built-in amplifier and external 2-axis unit

Supports high-capacity (7kW) motors

Increased number of “connectable” motors



Improved “connectivity” with welders

Greatly improved synchronization with welders

Simultaneous welding with multiple robots yields greatly improved quality.




Enhance your system by “connecting” commercial peripherals.

3D Vision System

2D/3D Vision System

Offline teaching system

Laser oscillator



Revolutionary Ease of Use

Clear and legible screen

Higher contrast with clearer details



Comfortable touch-typing

Embossed main keys



Lightweight with ergonomic grip


15% lighter + enhanced grip design = 66% less arm fatigue

TEACH PENDANT

Tablet-like operation



Menu icons



Scroll screen by swipe operation

Touch screen keypad for numeric entry



Enhanced Basic Performance

Small footprint

25% narrower than the previous model
Ideal for high-density installations




FD19 CONTROLLER

Complies with the latest international safety standards.

Supports multiple safety control standards for emergency stop: Cat. 4, PLe, and SIL3.


Programmable working envelope



Safer working environment

- RMU* constantly monitors robot movement.
- Restricts robot movement when worker is present in a shared area.

* Robot Monitoring Unit




Optimized for high-precision laser & plasma processing

Six times faster synchronization with external devices for high-precision laser and plasma processing




Laser oscillator



High-precision robot FD-A20

80% reduced! the variation in the position of signal output.

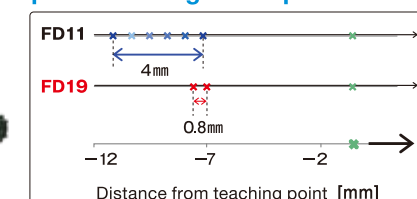

* At high speed operation of 10m/min.


Internal Torch Cable Type Ideal for Arc Welding

Standard Type for Arc Welding and Small Parts Handling

* The figures below show working range of P-point with no torch mounted.


Internal cable type

FD-B6

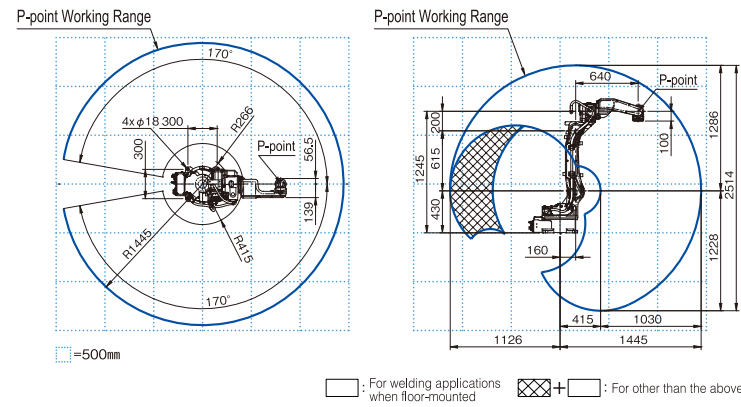


Standard type

FD-V8

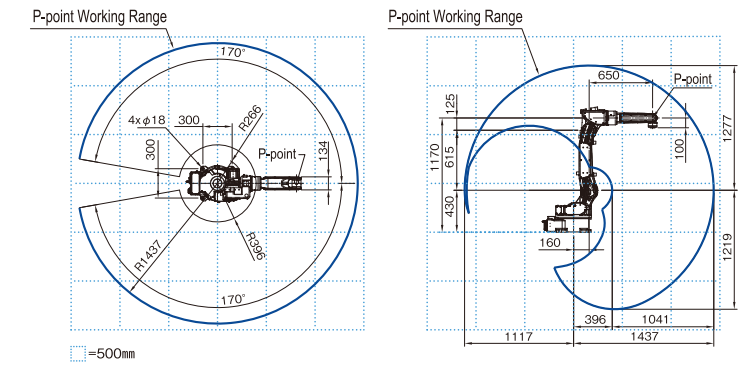


Internal cable type

FD-B6L

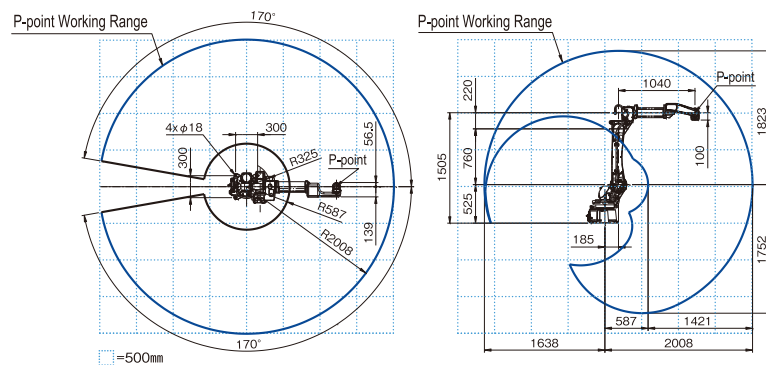

Standard type


FD-V8L

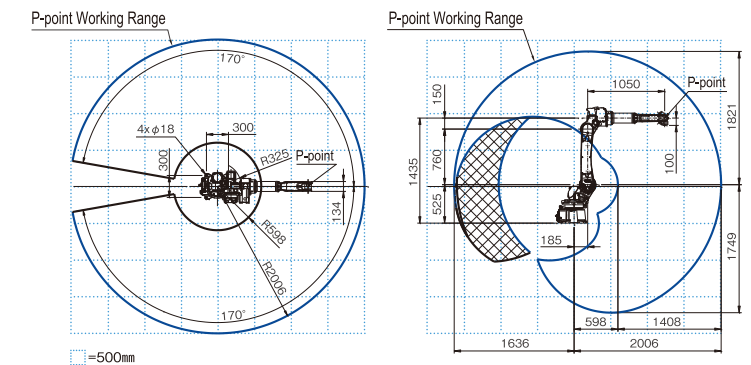

Internal cable type

FD-B4S


7-axis

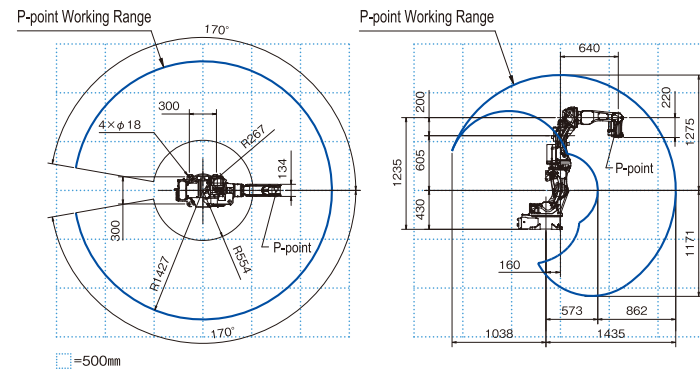

Standard type

FD-V6S


7-axis

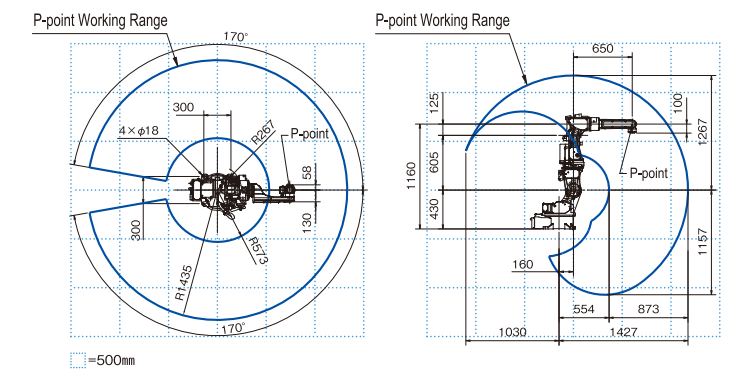

Internal cable type

FD-B4LS


7-axis

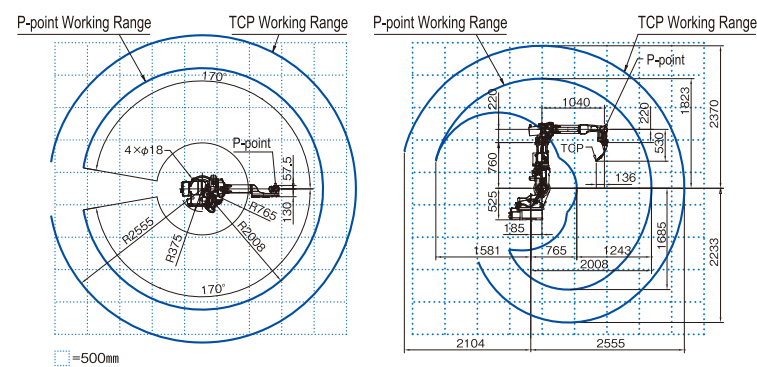

Standard type

FD-V6LS



7-axis

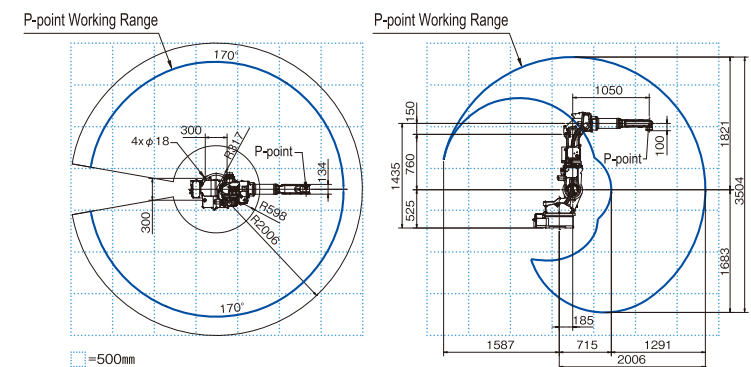

* The figures below show working range of P-point with no torch mounted.

Compact & lightweight



FD-S3

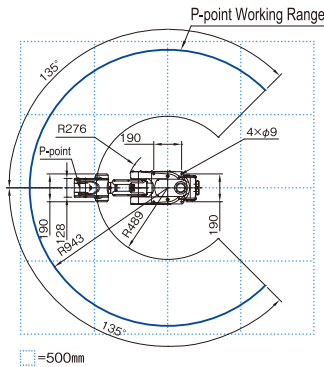

Versatile handling



FD-V20S

7-axis

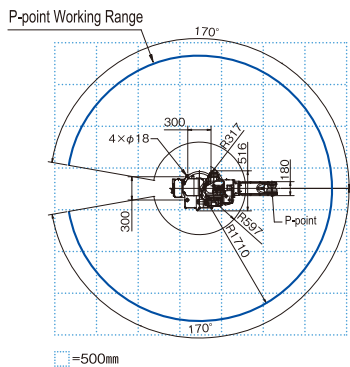



Compact & powerful

FD-H5

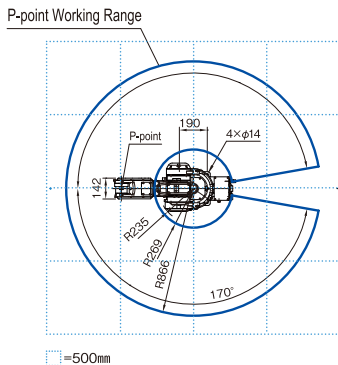

Versatile handling



FD-V50

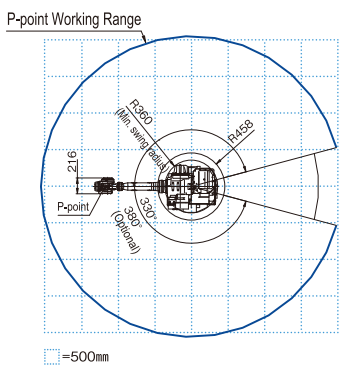

High-accuracy robot

FD-A20



Precise operation

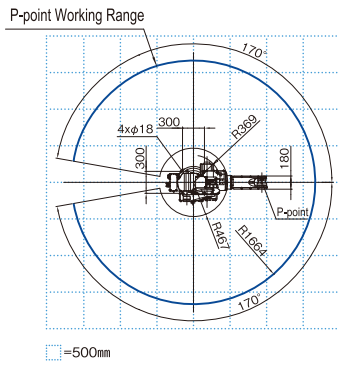

□: For welding applications when floor-mounted ⊗+□: For other than the above

Versatile handling



FD-V80

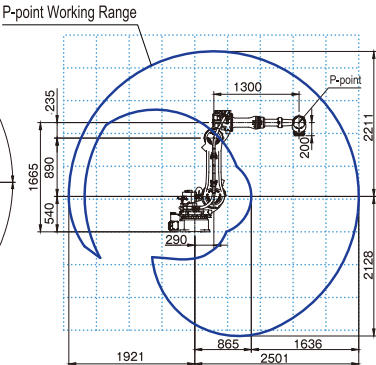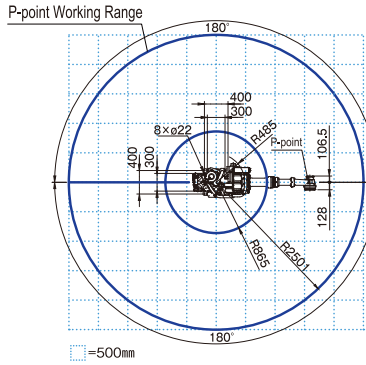

□: For welding applications when floor-mounted ⊗+□: For other than the above

Versatile handling



FD-V25

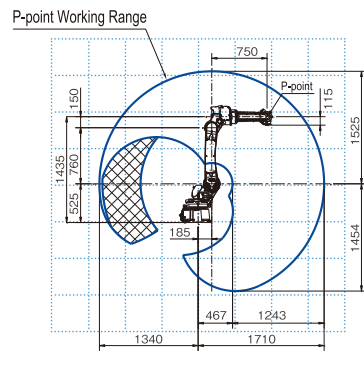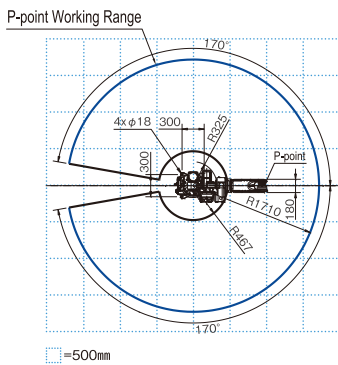

□: For welding applications when floor-mounted ⊗+□: For other than the above


Versatile handling

FD-B100

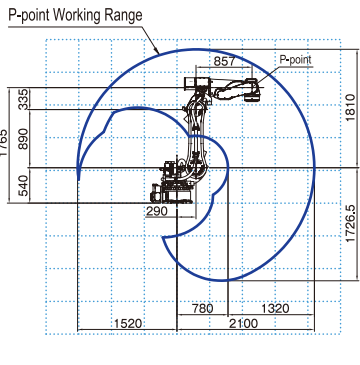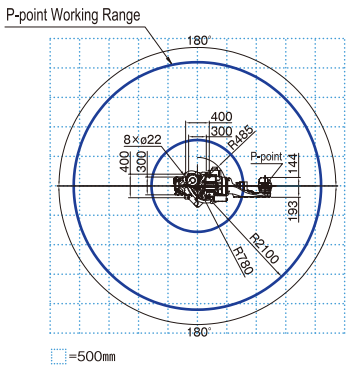


Versatile handling

FD-V100

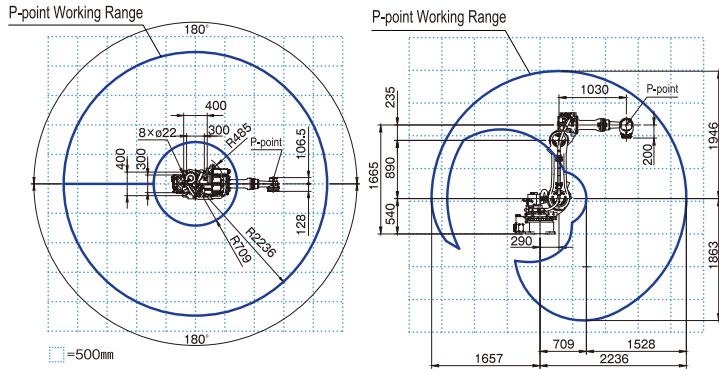


Versatile handling

FD-V130

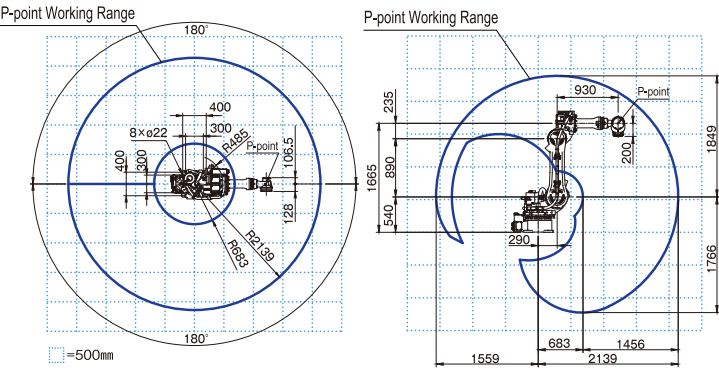


Versatile handling

FD-V166

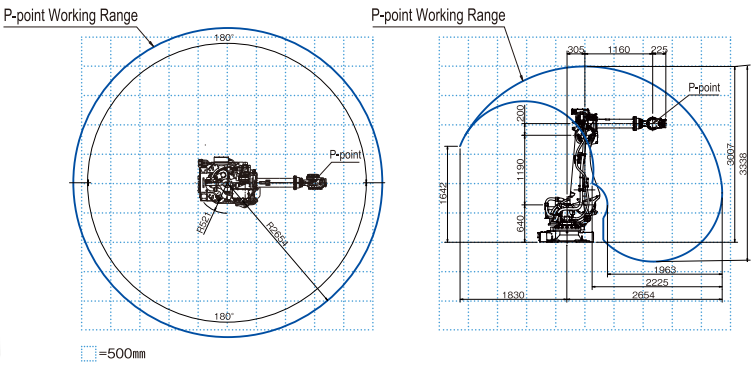


Versatile handling

FD-V210

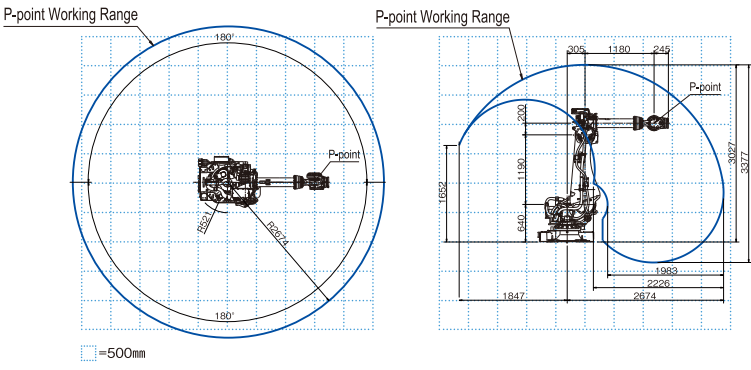


Heavy-load type

FD-V280L

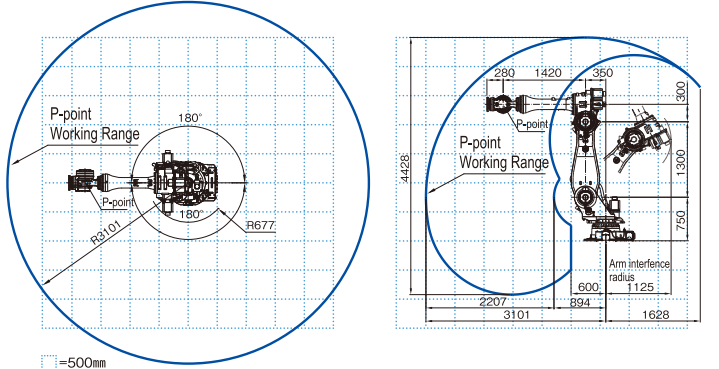


Heavy-load type

FD-V350

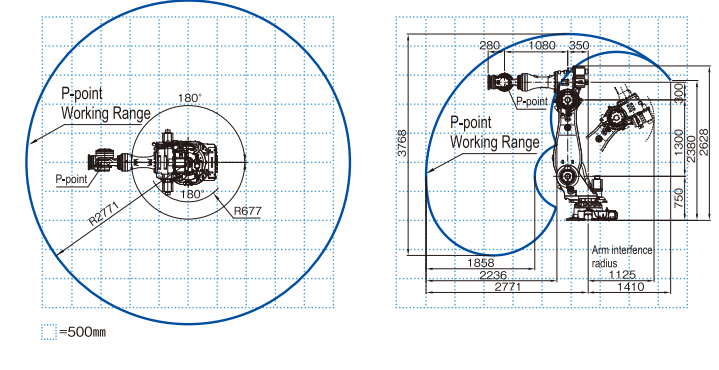


Heavy-load type

FD-V400L

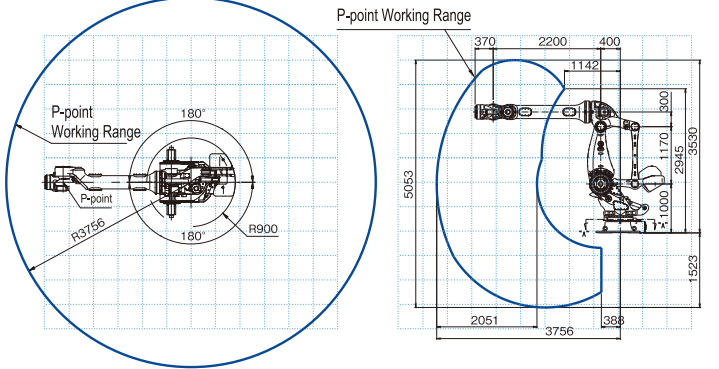

Heavy-load type

FD-V600/V700

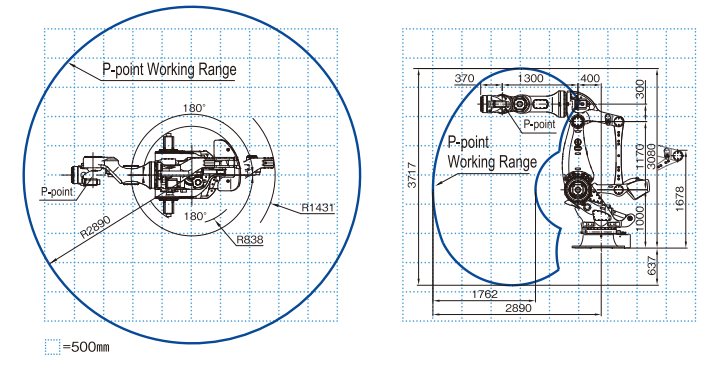

* The figures below show working range of P-point with no torch mounted.

Manipulator Specifications

			FD-B6	FD-B6L	FD-B4S	FD-B4LS	FD-V8	FD-V8L	FD-V6S	FD-V6LS
Model			NB6	NB6L	NB4S	NB4LS	NV8	NV8L	NV6S	NV6LS
Structure			Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type
Number of Axes			6	6	7	7	6	6	7	7
Wrist Capacity			6kg	6kg	4kg	4kg	8kg	8kg	6kg	6kg
Positional Repeatability (Note 1)			±0.08mm	±0.05mm	±0.08mm	±0.08mm	±0.08mm	±0.05mm	±0.08mm	±0.08mm
Driving Method			AC servo motor	◀	◀	◀	◀	◀	◀	◀
Driving Capacity			3132W	4632W	3550W	5650W	3016W	4800W	3600W	6000W
Positional Feedback			Absolute encoder	◀	◀	◀	◀	◀	◀	◀
Working Range	Arm	J1 (Rotation 1)	±170° (±50°) (Note 2)	±170° (±50°) (Note 2)	±170°	±170°	±170° (±50°) (Note 2)	±170° (±50°) (Note 2)	±170°	±170°
		J2 (Front/back)	−155° to +90° (Note 3)	−155° to +100° (Note 3)	−145° to +70°	−145° to +75°	−155° to +90°	−155° to +100°	−145° to +70°	−145° to +75°
		J7 (Rotation 2)	—	—	±90°	±90°	—	—	±90°	±90°
		J3 (Up/down)	−170° to +245° (Note 4)	−170° to +190°	−170° to +142.6°	−170° to +154°	−170° to +190°	−170° to +260°	−170° to +149°	−170° to +160° (Note 4)
	Wrist	J4 (Swing)	±155° (±170°) (Note 5)	±155° (±170°) (Note 5)	±155°	±155°	±180°	±180°	±180°	±180°
		J5 (Bending)	−45° to +225°	−45° to +225°	−45° to +225°	−45° to +225°	−50° to +230°	−50° to +230°	−50° to +230°	−50° to +230°
		J6 (Twist)	±205° (±360°) (Note 5,6)	±205° (±360°) (Note 5,6)	±205° (Note 6)	±205° (Note 6)	±360° (Note 6)	±360° (Note 6)	±360° (Note 6)	±360° (Note 6)
Maximum Speed	Arm	J1 (Rotation 1)	4.19rad/s {240°/s} (3.32rad/s {190°/s}) (Note 2)	3.93rad/s {225°/s} (3.05rad/s {175°/s}) (Note 2)	3.66rad/s {210°/s}	3.40rad/s {195°/s}	4.19rad/s {240°/s} (3.32rad/s {190°/s}) (Note 2)	3.93rad/s {225°/s} {3.05°/s {175°/s}} (Note 2)	3.66rad/s {210°/s}	3.40rad/s {195°/s}
		J2 (Front/back)	4.19rad/s {240°/s}	3.58rad/s {205°/s}	3.66rad/s {210°/s}	3.49rad/s {200°/s}	4.19rad/s {240°/s}	3.58rad/s {205°/s}	3.66rad/s {210°/s}	3.49rad/s {200°/s}
		J7 (Rotation 2)	—	—	3.14rad/s {180°/s}	2.79rad/s {160°/s}	—	—	3.14rad/s {180°/s}	2.79rad/s {160°/s}
		J3 (Up/down)	4.01rad/s {230°/s}	3.84rad/s {220°/s}	3.66rad/s {210°/s}	3.49rad/s {200°/s}	4.01rad/s {230°/s}	4.45rad/s {255°/s}	3.66rad/s {210°/s}	3.49rad/s {200°/s}
	Wrist	J4 (Swing)	7.50rad/s {430°/s}	7.50rad/s {430°/s}	7.33rad/s {420°/s}	7.33rad/s {420°/s}	7.50rad/s {430°/s}	7.85rad/s {450°/s}	7.33rad/s {420°/s}	7.33rad/s {420°/s}
		J5 (Bending)	7.50rad/s {430°/s}	7.50rad/s {430°/s}	7.33rad/s {420°/s}	7.33rad/s {420°/s}	7.50rad/s {430°/s}	7.50rad/s {430°/s}	7.33rad/s {420°/s}	7.33rad/s {420°/s}
		J6 (Twist)	11.00rad/s {630°/s}	11.00rad/s {630°/s}	10.5rad/s {600°/s}	10.5rad/s {600°/s}	11.00rad/s {630°/s}	11.00rad/s {630°/s}	10.82rad/s {620°/s}	10.82rad/s {620°/s}
Wrist Allowable Load	Allowable Moment	J4 (Rotation)	10.5N·m	10.5N·m	10.1 N·m	10.1 N·m	17.6N·m	17.6N·m	11.8 N·m	11.8 N·m
		J5 (Bending)	10.5N·m	10.5N·m	10.1 N·m	10.1 N·m	17.6N·m	17.6N·m	9.8 N·m	9.8 N·m
		J6 (Twist)	5.9N·m	5.9N·m	2.94 N·m	2.94 N·m	7.8N·m	7.8N·m	5.9 N·m	5.9 N·m
	Allowable Moment of Inertia	J4 (Rotation)	0.28kg·m²	0.28kg·m²	0.38 kg·m²	0.38 kg·m²	0.43kg·m²	0.43kg·m²	0.30 kg·m²	0.30 kg·m²
		J5 (Bending)	0.28kg·m²	0.28kg·m²	0.38 kg·m²	0.38 kg·m²	0.43kg·m²	0.43kg·m²	0.25 kg·m²	0.25 kg·m²
		J6 (Twist)	0.06kg·m²	0.06kg·m²	0.03 kg·m²	0.03 kg·m²	0.09 kg·m²	0.09kg·m²	0.06 kg·m²	0.06 kg·m²
Arm Cross-sectional Area			3.59m²×340°	6.37m²×340°	2.57m² × 340°	5.28m² × 340°	3.11m²×340°	7.48m²×340°	2.58m² ×340°	5.40m²×340°
Environmental Conditions		Temp: 0 to 45°C, Hmd: 20 to 80%RH (No Condensation)	◀	◀	◀	◀	◀	◀	◀	◀
Mass (weight)		145kg	237 kg	189 kg	321 kg	140 kg	237 kg	178 kg	316 kg	
Capacity of Upper Arm		10 kg (Note 7)	20kg (Note 7)	10 kg (Note 7)	10 kg (Note 7)	10 kg (Note 7)	20kg (Note 7)	10 kg (Note 7)	20 kg (Note 7)	
Installation Method		Floor-/Ceiling-/Wall-mounted	Floor-/Ceiling-/Wall-mounted	Floor-mounted	Floor-mounted	Floor-/Ceiling-/Wall-mounted	Floor-/Ceiling-/Wall-mounted	Floor-mounted	Floor-mounted	
Paint Color		White (Munsell notation 10GY 9/1)	◀	◀	◀	◀	◀	◀	◀	◀

Notes

1. Positional repeatability of the tool center point (TCP) value complies with the JIS-B-8432 Standard.

2. The value in the parentheses indicates the wall-mounting condition.

3. Working range of J6 axis may be restricted by the position of J5 axis.

4. When loading the Max. payload capacity as the end effector.

5. The capacity of the upper arm varies with the wrist capacity.

6. Working range of J2 axis may be restricted when wall-mounting.

7. The operation range of the J3 axis is restricted to −170 degrees to +205 degrees when floor-based welding is applied.

8. This value changes by placement and load conditions of a wrist.

* These specifications are subject to change without prior notice.

			FD-S3	FD-H5	FD-A20	FD-V25	FD-V20S	FD-V50	FD-V80	FD-B100
Model			NS3	NH5	NA20	NV25	NV20S	NV50	NV80	NB100
Structure			Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type
Number of Axes			6	6	6	6	7	6	6	6
Wrist Capacity			3kg	5kg	20kg	25kg	20kg	50kg	80kg	100kg
Positional Repeatability (Note 1)			±0.08mm	±0.05mm	±0.07mm	±0.04mm	±0.08mm	±0.07mm	±0.08mm	±0.06mm
Driving Method			◀	◀	◀	◀	◀	◀	◀	◀
Driving Capacity			390W	1440W	7900W	5400W	6600W	14750W	15100W	16000W
Positional Feedback			◀	◀	◀	◀	◀	◀	◀	◀
Working Range	Arm	J1 (Rotation 1)	±135°(±45°) (Note 2)	±170°	±170°	±170°(±50°) (Note 2)	±170°	±165 °	±180°	±180°
		J2 (Front/back)	−160° to +65°	−125° to +90°	−70° to +60°	−155° to +100° (Note 3)	−145° to +75°	+80° to −135 °	−155° to +90°	−155° to +90°
		J7 (Rotation 2)	—	—	—	—	±90°	—	—	—
		J3 (Up/down)	−130° to 125°	−140° to +245°	−140° to +240° (Note 4)	−170° to +260° (Note 4)	−170° to +160°	+260° to −146 °	−185° to +220°	−185° to +170°
	Wrist	J4 (Swing)	±180°	±190°	±180°	±180°	±180°	±360°	±360°	±210°
		J5 (Bending)	−40° to +220°	−30° to +210°	−50° to +230°	−50° to +230°	−50° to +230°	±125°	−35° to +215°	−35° to +215°
		J6 (Twist)	±360° (Note 6)	±360° (Note 6)	±360° (Note 6)	±360° (Note 6)	±360° (Note 6)	±450°	±360°	±210°
Maximum Speed	Arm	J1 (Rotation 1)	1.05rad/s {60°/s}	3.49rad/s {200°/s} (2.79rad/s {160°/s}) (Note 2)	3.40 rad/s {195°/s}	3.93rad/s {225°/s} (3.05rad/s {175°/s})	3.40rad/s {195°/s}	3.14 rad/s {180°/s}	2.44rad/s {140°/s}	2.44rad/s {140°/s}
		J2 (Front/back)	1.05rad/s {60°/s}	3.49rad/s {200°/s}	3.32 rad/s {190°/s}	3.58rad/s {205°/s}	3.32rad/s {190°/s}	3.14 rad/s {180°/s}	1.92rad/s {110°/s}	1.92rad/s {110°/s}
		J7 (Rotation 2)	—	—	—	—	2.79rad/s {160°/s}	—	—	—
		J3 (Up/down)	1.05rad/s {60°/s}	4.54rad/s {260°/s}	3.14 rad/s {180°/s}	4.45rad/s {255°/s}	3.14rad/s {180°/s}	3.14 rad/s {180°/s}	2.44rad/s {140°/s}	2.44rad/s {140°/s}
	Wrist	J4 (Swing)	3.14rad/s {180°/s}	6.63rad/s {380°/s}	6.98 rad/s {400°/s}	7.85rad/s {450°/s}	6.98rad/s {400°/s}	4.45 rad/s {255°/s}	3.05rad/s {175°/s}	3.58rad/s {205°/s}
		J5 (Bending)	3.14rad/s {180°/s}	6.63rad/s {380°/s}	6.98 rad/s {400°/s}	7.68rad/s {440°/s}	6.98rad/s {400°/s}	4.45 rad/s {255°/s}	3.05rad/s {175°/s}	3.67rad/s {210°/s}
		J6 (Twist)	3.14rad/s {180°/s}	8.90rad/s {510°/s}	10.5 rad/s {600°/s}	10.60rad/s {605°/s}	10.5rad/s {600°/s}	6.46 rad/s {370°/s}	4.45rad/s {255°/s}	5.67rad/s {325°/s}
Wrist/Allowable Load	Allowable Moment	J4 (Rotation)	7.94 N·m	11.9 N·m	43.7Nm	52.6N·m	43.7 N·m	210 N·m	433 N·m	650 N·m
		J5 (Bending)	6.47 N·m	11.9 N·m	43.7Nm	52.6N·m	43.7 N·m	210 N·m	430 N·m	650 N·m
		J6 (Twist)	4.12 N·m	5.2 N·m	19.6Nm	24.5N·m	19.6 N·m	130 N·m	294 N·m	294 N·m
	Allowable Moment of Inertia	J4 (Rotation)	0.219 kg·m²	0.303 kg·m²	1.09kgm²	1.24kg·m²	1.09 kg·m²	30 kg·m²	31.4 kg·m²	60.0 kg·m²
		J5 (Bending)	0.145 kg·m²	0.303 kg·m²	1.09kgm²	1.24kg·m²	1.09 kg·m²	30 kg·m²	31.4 kg·m²	60.0 kg·m²
		J6 (Twist)	0.059 kg·m²	0.061 kg·m²	0.24kgm²	0.33kg·m²	0.24 kg·m²	12 kg·m²	11.9 kg·m²	33.7 kg·m²
Arm Cross-sectional Area			0.82m² × 270°	1.22m² × 340°	3.32m²×340°	5.27m² × 340°	3.91m² × 340°	7.4 m² × 330°	9.53m² × 360°	6.21m² × 360°
Environmental Conditions			◀	◀	◀	◀	◀	◀	◀	◀
Mass (weight)			31 kg	58 kg	355 kg	241 kg	321 kg	640 kg	780 kg	793 kg
Capacity of Upper Arm			1 kg	1 kg	20 kg (Note 7)	10 kg (Wrist capacity: 25kg)(Note 7)	5 kg (Note 7)	15 kg (Note 7)	50 kg	50 kg (Note 7)
Installation Method			Floor-/Ceiling-/Wall-mounted	Floor-/Ceiling-/Wall-mounted	Floor-/Ceiling-mounted	Floor-/Ceiling-/Wall-mounted	Floor-mounted	Floor-mounted	Floor-/Ceiling-mounted	Floor-/Ceiling-mounted
Paint Color			◀	◀	◀	◀	◀	◀	◀	◀
IP code			—	—	—	—	—	—	Wrist axes:IP65/67 Base axes:IP54	[Handling Specifications] Wrist axes:IP65 Base axes:IP54 [Wrist axes:IP65/67 Specifications] Wrist axes:IP65/67 Base axes:IP54

Notes

1. Positional repeatability of the tool center point (TCP) value complies with the JIS-B-8432 Standard.

2. The value in the parentheses indicates the wall-mounting condition.

3. Working range of J6 axis may be restricted by the position of J5 axis.

4. When loading the Max. payload capacity as the end effector.

5. The capacity of the upper arm varies with the wrist capacity.

6. Working range of J2 axis may be restricted when wall-mounting.

7. The operation range of the J3 axis is restricted to −170 degrees to +205 degrees when floor-based welding is applied.

8. This value changes by placement and load conditions of a wrist.

* These specifications are subject to change without prior notice.

Manipulator Specifications

			FD-V100	FD-V130	FD-V166	FD-V210	FD-V280L	FD-V350	FD-V400L	FD-V600	FD-V700
Model			NV100	NV130	NV166	NV210	NV280L	NV350	NV400L	NV600	NV700
Structure			Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type	Vertically articulated type
Number of Axes			6	6	6	6	6	6	6	6	6
Wrist Capacity			100kg	100kg	166kg	210kg	280kg	350kg	400kg	600kg	700kg
Positional Repeatability (Note 1)			±0.08mm	±0.08mm	±0.1mm	±0.15mm	±0.2mm	±0.2mm	±0.3mm	±0.3mm	±0.3mm
Driving Method			AC servo motor	◀	◀	◀	◀	◀	◀	◀	◀
Driving Capacity			15100W	15100W	18kW	18kW	30kW	◀	27kW	◀	◀
Positional Feedback			Absolute encoder	◀	◀	◀	◀	◀	◀	◀	◀
Working Range	Arm	J1 (Rotation 1)	±180°	±180°	±180°	±180°	±180°	±180°	±180°	±180°	±180°
		J2 (Front/back)	−155° to +90°	−155° to +90°	−80° to +60°	−80° to +60°	−100° to +40°	−100° to +40°	−105° to +60°	−105° to +60°	−105° to +60°
		J3 (Up/down)	−185° to +220°	−185° to +220°	−146.5° to +150°	−146.5° to +150°	−147° to +130°	−180° to +130°	−130° to +30°	−140° to +30°	−140° to +30°
	Wrist	J4 (Swing)	±360°	±360°	±360°	±360°	±360°	±360°	±210°	±210°	±210°
		J5 (Bending)	−35° to +215°	−35° to +215°	±135°	±130°	±125°	±125°	±120°	±120°	±120°
		J6 (Twist)	±360°	±360°	±360°	±360°	±360°	±360°	±210° (±360°) (Note 8)	◀	◀
Maximum Speed	Arm	J1 (Rotation 1)	2.44rad/s {140°/s}	2.44rad/s {140°/s}	2.18rad/s {125°/s}	2.01rad/s {115°/s}	1.83rad/s {105°/s}	1.83rad/s {105°/s}	1.57rad/s {90°/s}	1.57rad/s {90°/s}	1.40rad/s {80°/s}
		J2 (Front/back)	1.92rad/s {110°/s}	1.92rad/s {110°/s}	2.01rad/s {115°/s}	1.83rad/s {105°/s}	1.83rad/s {105°/s}	1.66rad/s {95°/s}	1.57rad/s {90°/s}	1.57rad/s {90°/s}	1.40rad/s {80°/s}
		J3 (Up/down)	2.44rad/s {140°/s}	2.44rad/s {140°/s}	2.11rad/s {121°/s}	1.97rad/s {113°/s}	1.66rad/s {95°/s}	1.66rad/s {95°/s}	1.57rad/s {90°/s}	1.57rad/s {90°/s}	1.40rad/s {80°/s}
	Wrist	J4 (Swing)	3.05rad/s {175°/s}	3.05rad/s {175°/s}	3.14rad/s {180°/s}	2.44rad/s {140°/s}	2.09rad/s {120°/s}	1.92rad/s {110°/s}	1.92rad/s {110°/s}	1.92rad/s {110°/s}	1.74rad/s {100°/s}
		J5 (Bending)	3.05rad/s {175°/s}	3.05rad/s {175°/s}	3.02rad/s {173°/s}	2.32rad/s {133°/s}	2.09rad/s {120°/s}	1.92rad/s {110°/s}	1.92rad/s {110°/s}	1.92rad/s {110°/s}	1.74rad/s {100°/s}
		J6 (Twist)	4.45rad/s {255°/s}	4.45rad/s {255°/s}	4.54rad/s {260°/s}	3.49rad/s {200°/s}	3.49rad/s {200°/s}	3.14rad/s {180°/s}	3.14rad/s {180°/s}	3.14rad/s {180°/s}	2.79rad/s {160°/s}
Wrist Allowable Load	Allowable Moment	J4 (Rotation)	721 N·m	721 N·m	951 N·m	1,337 N·m	1921 N·m	2750 N·m	3450 N·m	3450 N·m	3450 N·m
		J5 (Bending)	721 N·m	721 N·m	951 N·m	1,337 N·m	1921 N·m	2750 N·m	3450 N·m	3450 N·m	3450 N·m
		J6 (Twist)	294 N·m	294 N·m	490 N·m	720 N·m	988 N·m	1235 N·m	1725 N·m	1725 N·m	1725 N·m
	Allowable Moment of Inertia	J4 (Rotation)	60.0 kg·m²	60.0 kg·m²	88.9 kg·m²	141.1 kg·m²	400kg·m²	400kg·m²	600kg·m²	600kg·m²	600kg·m²
		J5 (Bending)	60.0 kg·m²	60.0 kg·m²	88.9 kg·m²	141.1 kg·m²	400kg·m²	400kg·m²	600kg·m²	600kg·m²	600kg·m²
		J6 (Twist)	33.7 kg·m²	33.7 kg·m²	45.0 kg·m²	79.0 kg·m²	250kg·m²	250kg·m²	400kg·m²	400kg·m²	400kg·m²
Arm Cross-sectional Area			7.56m² × 360°	6.83m² × 360°	6.58m² × 360°	6.67m² × 360°	8.72m² × 360°	6.77m² × 360°	10.72m² × 360°	6.60m² × 360°	6.60m² × 360°
Environmental Conditions			Temp: 0 to 45°C, Hmd: 20 to 80%RH (No Condensation)	◀	◀	◀	◀	◀	◀	◀	◀
Mass (weight)			770kg	765kg	1010kg	1040kg	1660kg	1620 kg	3050 kg	2850 kg	3320 kg
Capacity of Upper Arm			50kg	50kg	45kg (90kg max.) (Note 7)	45kg (90kg max.) (Note 7)	25kg max. (Note 7)	50kg max. (Note 7)	50kg max. (Note 7)	50kg max. (Note 7)	25kg max. (Note 7)
Installation Method			Floor-/Ceiling-mounted	Floor-/Ceiling-mounted	Floor-mounted	◀	◀	◀	◀	◀	◀
Paint Color			White (Munsell notation 10GY 9/1)	◀	◀	◀	◀	◀	◀	◀	◀
IP code			Wrist axes:IP65/67 Base axes:IP54	◀	—	—	Wrist axes:IP67P Base axes:IP54P	◀	◀	◀	◀

Notes

1. Positional repeatability of the tool center point (TCP) value complies with the JIS-B-8432 Standard.

2. The value in the parentheses indicates the wall-mounting condition.

3. Working range of J6 axis may be restricted by the position of J5 axis.

4. When loading the Max. payload capacity as the end effector.

5. The capacity of the upper arm varies with the wrist capacity.

6. Working range of J2 axis may be restricted when wall-mounting.

7. The operation range of the J3 axis is restricted to −170 degrees to +205 degrees when floor-based welding is applied.

8. This value changes by placement and load conditions of a wrist.

* These specifications are subject to change without prior notice.

Peripheral Equipment Jig Positioner


- 8 models of positioners available from 250 kg to 1,000 kg payload capacity.
- Operation of the positioner is totally controlled by the robot teaching pendant. Positioners can be operated independently or synchronized with the robot.
- High accuracy operation is made possible by the same AC servo motor and non-backlash reduction gear that is used for the robot.
- Synchronized motion when using with the OTC robot.

Positioner

Positioner Headstock 1PB Series

- Can be used to build varied jig systems with a large degree of positioning flexibility.
- A hole through the center of the rotary table, enabling cables and hoses to be routed through easily.


1PB250

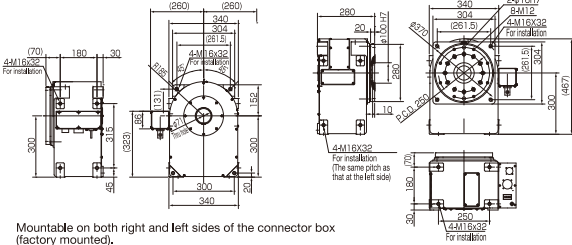

Mountable on both right and left sides of the connector box (factory mounted).

Model Name	A2PB252-E
Max. Payload Capacity	250 kg
Rotating Speed	2.6 rad/s {150°/s}
Allowable Rotating Torque	206 N·m
Position Repeatability	±0.1 mm (Position at R300 mm)
Stop Position	Random
Mass (Weight)	110 kg


1PB500

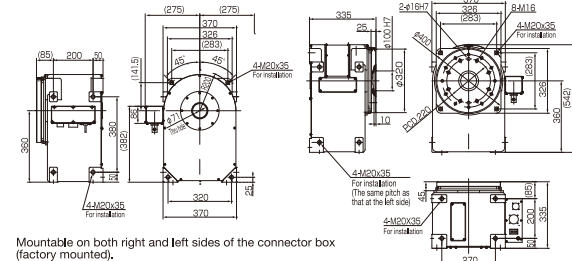

Mountable on both right and left sides of the connector box (factory mounted).

Model Name	A2PB502-E
Max. Payload Capacity	500 kg
Rotating Speed	2.1 rad/s {120°/s}
Allowable Rotating Torque	490 N·m
Position Repeatability	±0.1 mm (Position at R300 mm)
Stop Position	Random
Mass (Weight)	170 kg

1PB1000

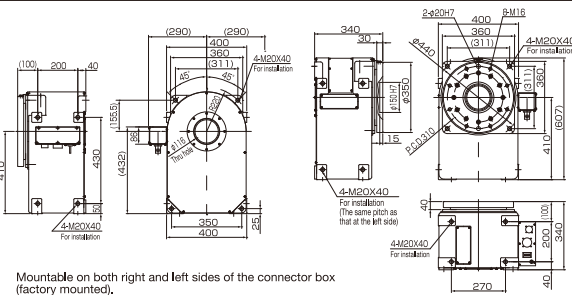

Mountable on both right and left sides of the connector box (factory mounted).


Model Name	A2PB1002-E
Max. Payload Capacity	1000 kg
Rotating Speed	1.3 rad/s {72°/s}
Allowable Rotating Torque	1078 N·m
Position Repeatability	±0.1 mm (Position at R300 mm)
Stop Position	Random
Mass (Weight)	220 kg

Positioner


Positioner Headstock 1PC Series

- Designed for Compact, lightweight and easy installation.
- A hole through the center of the rotary table, enabling cables and hoses to be routed through easily.

1PC500

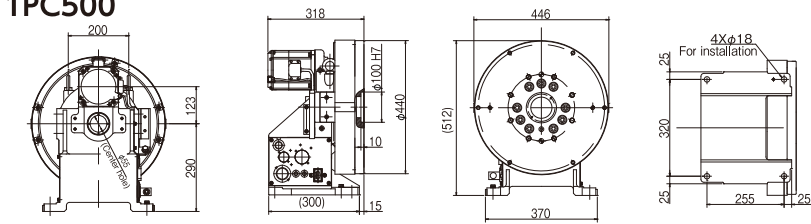

1PC1000

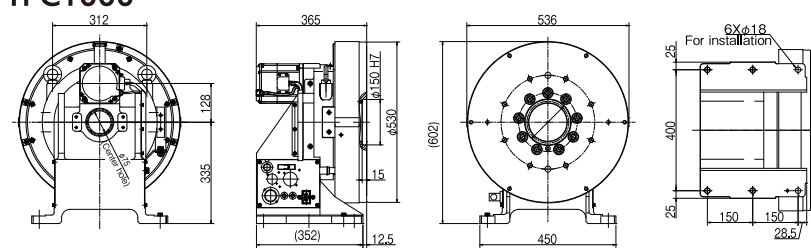

Model Name	PC501	PC1001
Max. Payload Capacity	500kg	1000kg
Rotating Speed	2.1dad/s {120°/s}	1.3dad/s {72°/s}
Allowable Rotating Torque	490N·m	1078N·m
Position Repeatability	±0.1 mm (Position at R300 mm)	±0.1 mm (Position at R300 mm)
Stop Position	Random	Random
Mass (Weight)	110kg	193kg



1PC500

Peripheral Equipment Jig Positioner,Slider

Positioner


2-Axes Double Support Positioner 2PF Series

- High-speed motion increases production efficiency. An increase in the maximum rotation speed of the tilting axis by 2.5 times and in rotation axis by two times was achieved in comparison with the conventional machine 300 kg payload type.


2PF300·500·1000



2PF300·500

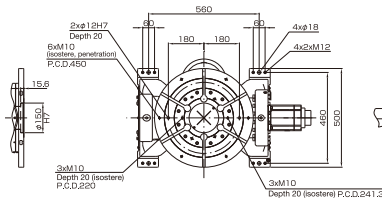

2PF1000

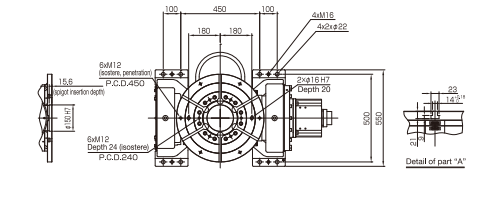


Model Name	A2PF301-ENN	A2PF501-ENN	A2PF1001-ENN
Max. Payload Capacity	300 kg	500 kg	1000 kg
Rotating Speed	3.1 rad/s {180°/s}	2.8 rad/s {162°/s}	2.9 rad/s {166°/s}
Tilting Speed	2.2 rad/s {125°/s}	1.5 rad/s {84°/s}	1.4 rad/s {82°/s}
Rotating Torque	294 N·m	392 N·m	882 N·m
Tilting Torque	882 N·m	1347 N·m	3704 N·m
Position Repeatability	±0.08 mm (Position at R250 mm)	±0.08 mm (Position at R250 mm)	±0.08 mm (Position at R250 mm)
Stop Position	Random	Random	Random
Mass (Weight)	260 kg	260 kg	470 kg


- Sliders are available in 12 models with strokes between 1 m and 6.9 m.
- Employment of an AC servo motor and non-backlash reduction gear provides the same high accuracy operation as that of robots.
- Combination with the OTC robot allows synchronized operation.
- The cable bearer is provided in the center of the slider, which allows space-saving installation.

Slider

Linear Sliders (Light Duty) Model 1SB

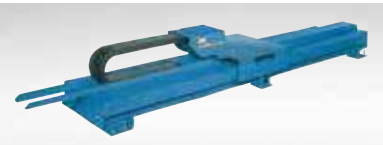


- A maximum of 330 kg can be loaded.
- Dust-proof structure prevents spatter, oil and dust from entering.

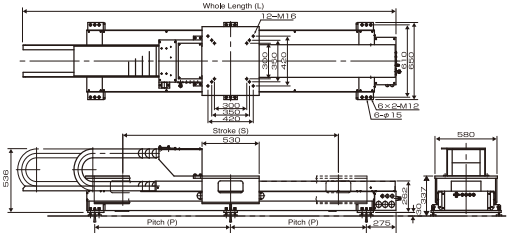


Slider

Linear Sliders (Standard Duty) Model 1SR

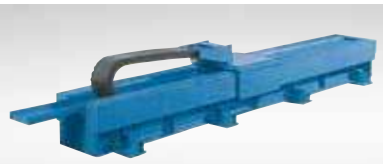


- Standard Duty with a maximum loading weight of 330 kg
- Dust-proof structure prevents spatter, oil and dust from entering.

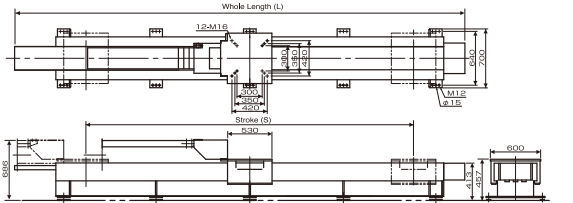


Slider

Linear Sliders (with Carriage Duty) Model 1SR-P

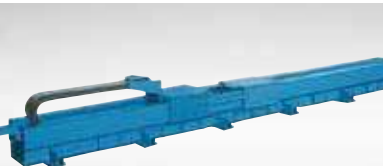

- The wire pack can be mounted on the truck connected to the robot-mounting part.
- Dust-proof structure prevents spatter, oil and dust from entering.

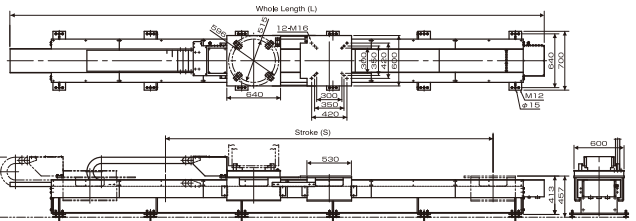


	Model 1SB		Model 1SR					Model 1SR-P				
Model Name	A2SB102-E, A2SB202-E		A2SR292-E, A2SR392-E, A2SR492-E, A2SR592-E, A2SR692-E					A2SR19P2-E, A2SR29P2-E, A2SR39P2-E, A2SR49P2-E, A2SR59P2-E				
Stroke Length	1 m, 2 m		2.9 m, 3.9 m, 4.9 m, 5.9 m, 6.9 m					1.9 m, 2.9 m, 3.9 m, 4.9 m, 5.9 m				
Max. Moving Speed	0.3 m/s		0.295 m/s					0.295 m/s				
Max. Mounting Capacity	330 kg		330 kg					660 kg (330 kg for each table)				
Position Repeatability	±0.1 mm		±0.1 mm					±0.1 mm				
	A2SB102-J	A2SB202-J	A2SR292-J	A2SR392-J	A2SR492-J	A2SR592-J	A2SR692-J	A2SR19P2-J	A2SR29P2-J	A2SR39P2-J	A2SR49P2-J	A2SR59P2-J
Stroke S (mm)	1000	2000	2900	3900	4900	5900	6900	1900	2900	3900	4900	5900
Whole Length L (mm)	2510	3510	4500	5500	6500	7500	8500	4500	5500	6500	7500	8500
Mass (kg)	450	550	650	750	850	950	1050	800	900	1000	1100	1200

* Ensure that the total mass of the manipulator and other peripherals does not exceed the payload capacity.

Internet connecting service

Robots can be connected to service centers via the Internet to remotely provide advice on construction conditions and operations

Remote maintenance

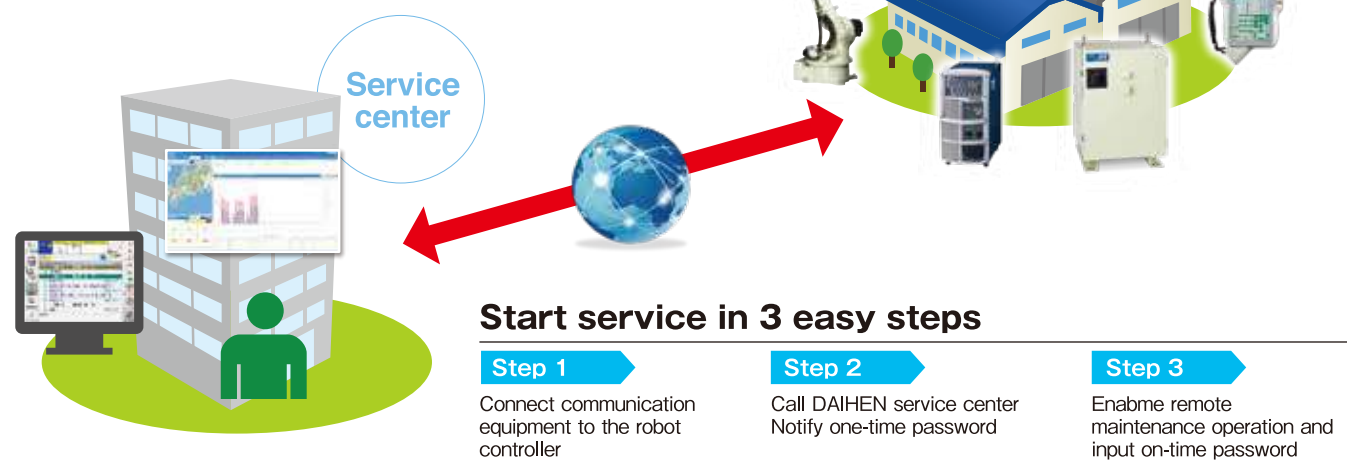

Customer preparations

The internet connection environment will be prepared by the customer

LTE router

- Data communication SIM card
- LAN cable

※Recommended:UD-LT1/EX(Made by IO data)(Consumable goods)

Smartphone

※Use tethering function of Android phone. (USB cable)

Internal LAN

- Internet connection
- LAN cable

1)Data communication charges will be borne by the customer.
2)This system uses communication equipment, so it may not be possible to use the function as intended due to communication status or interference.

Joystick pendant

Intuitive ROBOT operation with one hand
Joystick Pendant JoyPEN

All direction operation

Intuitively operation of the robot by the orientation of JoyPEN and the tilt of the joystick.

Automatic recording the operation path

Touch-sensing assistance

Wireless teach pendant

Enables robot to be operated wirelessly. Supports all current models.
WiTP Wireless Teach Pendant

Reduced Teaching Burden

Because no bulky cable is required, the operator can perform teaching with ease while moving about effortlessly.

Operates Multiple Robots with a Single Pendant

To switch between robots, simply select the desired robot number with the pendant and perform identification steps according to the guide.

Certified for Wireless Operation — An Industry First

Features the servo block function activated by a robot emergency stop button and an enable switch.

This device has already been certified by TÜV SÜD as meeting the IEC61508 SIL2 and ISO 13849 Cat. 3 PL d standards for functional safety.
Certification No. Z10 14 08 88597 003

PC software


High-accuracy/high-performance teaching & simulation achieved by the same operation as that of robot!

Offline teaching system
FD-ST

New function realizing simplified operation!


Cooperation with CAD

Automatically generates teaching program from CAD data. And direct transfer to the robot controller.

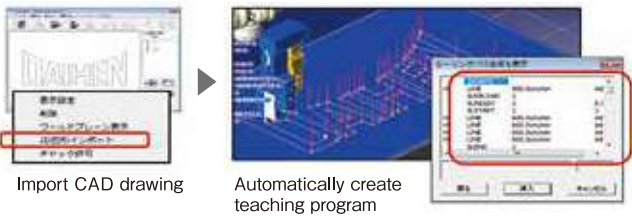


Handling support

Simulate attach/detach action of work piece. Reduce the verification time of actual robot.



TP Connect

Physical teach pendant (TP) can be used with FD-ST.



Fully compatible with the controller FD19



This teaching system can be operated by the same operation of the robot controller FD19. If OTC standard robot system is provided, the setup can be completed only by reading the backup data.


PC software

PC-based Welding Quality Control

Robot Welding Control System
FD-AM

Simple configuration and collect all welding data.

With the teach pendant, the operator can monitor conditions during the welding process and even record welding data on a PC. This makes it possible to manage all aspects of welding, including "when, where, what and how."

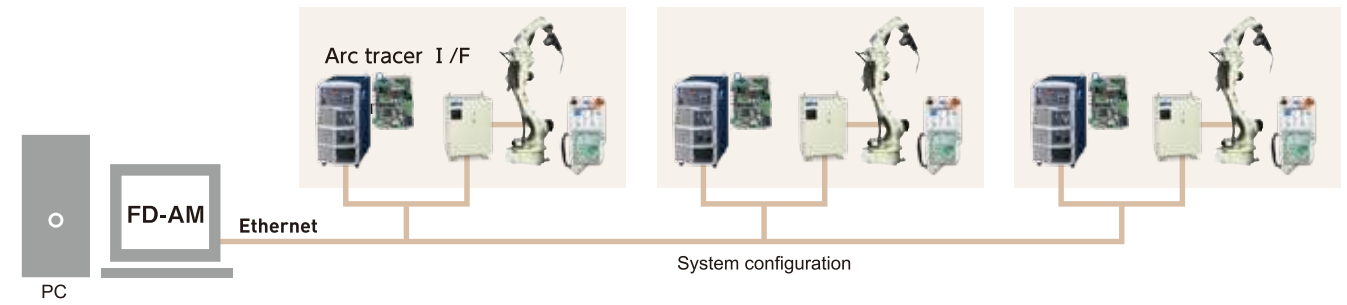

Teach Pendant Monitor

Item	Details
Maximum sampling frequency (Maximum sampling cycle)	20 Hz (50 ms) Maximum sampling frequency can be set individually for each monitored parameter.
Monitored parameters (11 in total)	Electric current, voltage, feed load, feed speed (feed device), feed speed (measurement unit), feed motor electric current**, gas flow quantity*, gas pressure*, welding power supply primary-side voltage**, welding power supply internal temperature**, welding power supply fan rotation rate**
Indication style	Numerical values indicated with a wave pattern
Welding result indications	Mean value, maximum value, minimum value, welding time, welding distance

* Optional ** All models of the Welbee Invertor series only.

FD-AM (PC software)

Item	Details
Maximum sampling frequency (Maximum sampling cycle)	10 kHz (Electric current & voltage: 100 μ s, Other: 50 ms) Maximum sampling frequency can be set individually for each recorded parameter.
Recorded parameter	Commands (5 in total) Monitored parameters (11 in total) Feed speed (measurement unit)*, feed motor electric current**, gas flow quantity*, gas pressure*, welding power supply primary-side voltage**, welding power supply internal temperature**, welding power supply fan rotation rate**
Welding result indications	Real time History Mean value, maximum value, minimum value, welding time, welding distance Mean value, welding time, welding distance, welding abnormalities
Communication method	Via Ethernet. Features automatic connection and reconnection with robots.
Welding point identification	Robot control device name, program comment, work name, work serial number, welding section name
Abnormality monitoring function	Divergence from command value, deviation from rated value
Abnormality indication	Abnormal number and error message indication

*Optional ** All models of the Welbee Invertor series only.

Workpiece position detection sensor

Touch sensor FD-WD

Workpiece position detection sensor by touching the welding wire

- Applicable to all the workpieces with a medium thickness or thicker.
- Most inexpensive among all workpiece position detection sensors.
- Requires no separate sensor unit because this sensor has a built-in controller.
- Allows high-speed search at up to 360 cm/min.
- A separate sensor unit (optional) is ready for hardly energized surfaces such as rust and black scale.



Tracking sensor for CO₂/MAG welding

Arc sensor FD-AR

Automatic seam tracking by weaving

- This sensor allows correction of curved workpiece or thermal distortion which can't be corrected only by detecting workpiece position.
- Applicable to workpieces with medium thickness or thicker.
- Most inexpensive among all the tracking sensors.
- Easy to use from the viewpoints of interference of workpieces and maintenance because this sensor requires no additional parts around the torch.
- Can't be used for tracking on aluminum.



Tracking sensor for TIG welding

TIG arc sensor FD-TR

Automatic seam tracking in TIG welding

- Allows arc length constant control (vertical tracking) in TIG.
- Allows stable execution of welding by keeping the arc length constant to the thermal distortion of thin plate.
- Allows high-accuracy tracking even in pulse TIG welding.
- Easy to use from the viewpoints of interference of workpieces and maintenance, because it requires no additional parts around the torch.



Workpiece position detection	○ (The maximum two-way displacement detection rate per site is about 5 seconds.)	×	×
Seam tracking	×	○	○ (only vertical tracking)
Recognition of groove shape	×	×	×
Combination with other sensors	This sensor can be used together with an arc sensor or TIG arc sensor.	Combination use of the touch sensor and laser sensor is possible.	Combination use of the touch sensor and laser sensor is possible.
Applicable workpieces	Plate thickness: 3.2 mm or more	Plate thickness: 3.2 mm or more	(Plate thickness: 1.0 mm or more)
Accuracy	±1.0 mm (provided that the bend of wire does not change)	±1.0 mm (provided that arc and pool are stable)	±0.5 mm (when the electrode is not worn)
Workpiece material	All the materials and surfaces to be energized	Iron system, stainless steel system	All the materials which can be welded

Laser start point detection sensor

Laser search FD-QD

Workpiece position detection sensor by wire touch

- Realizes higher speed and higher accuracy than those of the touch sensor.
- Allows high accuracy detection for a wide spectrum of applications from thin plate to medium thickness plate.
- Allows recognition of various welding joints by easy operation.
- Allows visual check of the recognition result using a teach pendant.
- Enables automatic change of the welding condition based on the recognition result.
- Can be used for applications other than welding.




High-speed and high-accuracy laser start point detection sensor

Laser Search FD-QF

High-speed workpiece position detection sensor using laser

- Thanks to the two-dimensional laser, the cross-section of a groove can be instantaneously detected without movement of the robot (detection time is 1/5 or less compared with that of a touch sensor).
- The high-speed and high-accuracy detection is highly adaptable to thin-plate welding.
- Also accommodates thick-plate applications with high accuracy thanks to improved environmental resistance.
- Enables automatic change of the welding condition based on the recognition result.

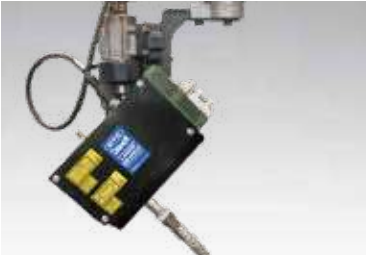


Laser tracking sensor

Laser sensor FD-QT

High accuracy welding line tracking by laser

- High accuracy 3D tracking for complex shape work piece.
- The sensor automatically adjusts optimal position and posture with simple teaching.
- Workpiece position detection
- For thin material and high accuracy
- Real time adjustment of welding conditions by adaptive control
- TIG welding also possible

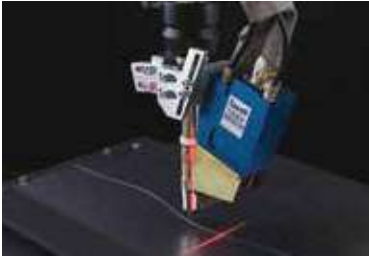

Workpiece position detection	○ (The maximum two-way displacement detection rate per site is about 1.5 seconds)	○ (The maximum one-way displacement detection rate is about 0.3 seconds.)	○
Seam tracking	×	×	○
Recognition of groove shape	○	○	○
Combination with other sensors	This sensor can be used together with the touch sensor, arc sensor or TIG arc sensor.	This sensor can be used together with the touch sensor, arc sensor or TIG arc sensor.	Unnecessary (Welding line tracking and position detection is possible.)
Applicable workpieces	(Plate thickness: 1.0 mm or more)	(Plate thickness: 0.5 mm or more)	Plate thickness 0.1 mm or more
Accuracy	±0.5 mm (Search speed 100 cm/min or less. For stand-alone robot)	±0.2 mm (provided that cross-sectional shape of detection area does not change)	±0.4mm (provided that cross-sectional shape of detection area does not change)
Workpiece material	The surface shall not be glossy (nonmetal is permitted).	The surface shall not be glossy (nonmetal is permitted).	The surface shall not be glossy (nonmetal is permitted).

Welding peripherals

Reduces the sudden flow of gas and constantly controls the flow of shielding gas.

Gas Saver GFC



Features and mechanism of Gas Saver


- The gas flow rate from each welding section can be adjusted with the Teach Pendant. You can also set the gas flow rate for particular types of gas or welding methods.
- The actual gas flow rate can be monitored in real time with the Teach Pendant.



- The flow control prevents a sudden increase in flow at the start of welding. Because it controls the flow with high accuracy in real time, the desired gas flow rate can be kept stable (flow accuracy ±2%).
- While the gas is flowing, the flow rate is constantly monitored. If a flow shortage occurs, the robot can be stopped.

[Mechanism of gas wastage when no gas saver is used]

- During welding: The flow control valve maintains a constant flow rate.
- During welding stop: The pressure regulator allows high-pressure gas to accumulate in the gas hose between the gas flow regulator and the solenoid valve.
- At the start of welding: The high-pressure gas in the hose is instantly released, becoming waste gas.



Welding peripherals

For automatic removal of spatters in the nozzle

Air blow kit



Only addition of the air blow kit to CO₂/MAG standard torch enables quick-change into the air blow style tip body!

Advantages of air blow specification


- Automatic removal of spatters in the nozzle with air, prevention of welding interruption.
- Enhancement of the life of nozzle by cooling the nozzle with air, reduction in the running cost.

Note: Compatible with RT3500*, RT5000* and RZ35***

Welding peripherals

For automatic cleaning of the torch and wire cutting

Clean kit

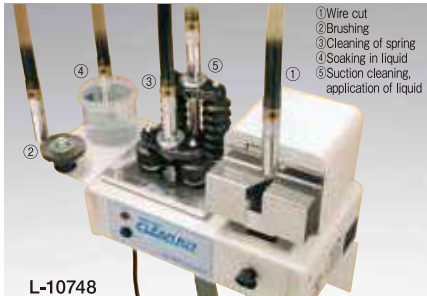

The clean kit has realized improvement in the operation rate of welding robot and the welding quality.

- Automatically removes spatters in the torch nozzle. (L-10748, K-2725)
- Enables simultaneous operation of cleaning and application of adhesive spatter inhibitors. (L-10748, K-2725)
- Brushing function is added to wire cutting function (K-2726). (L-10748, K-2725)

Dual cleaning function (only for L10748)

Unburdened by manual cleaning! Improved safety of operation!

	Eccentric spring type drill			
	[Features]	• The clean kit cleans the inside of the nozzle and the outer surface of the tip simultaneously by eccentric rotation.		
	[Effects]	• The eccentric spring type drill scrapes spatters away effectively in the right and left directions and downwards by rotation of the eccentric spring type drill. • The spring type drill can move to the depth of the nozzle and scrape spatters out.		
	Powerful suction device			
	[Features]	• The powerful suction device allows removal of all spatters in the depth of the nozzle by suctioning, and uniform application of a proper amount of anti-deposition agent to the depth of the torch by forming mist of a small amount of the agent applied on the top of the torch by powerful suction simultaneously.		
	[Effects]	• The device can remove spatter hanging down stubbornly by suctioning with high finishing and cleaning accuracy. • It has the nozzle cooling effect (capable of cooling the nozzle to 40 to 50°C during cleaning). (Ratio compared with the former: 1/5) and can prevent dripping. *Another air source is required during use of this function.		

Model	L-10748	K-2725	K-2726
Internal diameter of nozzle	Choice from among φ13, 16, and 19.	—	—
Power source	Choice from among	AC100V 50/60Hz	—
Power consumption (W)	48/55	52/57	50
Air source (MPa)	0.49	Unnecessary	Unnecessary
Total width×Total height (mm)	438 × 195 × 233	498 × 188 × 227	132 × 190 × 143
Weight (kg)	11	9.7	4.5
Applicable wire diameter	φ1.6 or less		
Accessories	Guide metal tting. Special-purpose metal xtire set. Discharge duct set	Guide metal tting. Special-purpose metal xtire set	Special-purpose metal xtire set
Others	The spatter anti-deposition agent is optional.		
Functions	Dual nozzle cleaning: ○(Dual)	○(Single)	—
Functions	Wire cut: ○	○	○
Functions	Brushing: ○	○	—

* The clean kits L-10748 and K-2725 are not compatible with the forced pressurized power feeding torch (TCC torch).

Torch for robot

Our bestselling CO₂/MAG torch compatible with a shock sensor

Torch



Model RT3500H is shown mounted with optional SSV Shock Sensor Unit.

Model	Maximum welding current (MAG welding)	Rated duty cycle (MAG welding)
RT3500S/L/H	350A (350A)	80% (60%)
RT5000S/L/H	500A (350A)	50% (70%)
RTW5000S/L/H	500A (400A)	70% (60%)